

LAMAR | PRE-ASSEMBLED EXTENSIONS

Assembly Guide and Best Practices


PRE-ASSEMBLED EXTENSION KITS

Pre-Assembled Extension Kits are fully assembled sections of Lamar Graphics Extension Kits. Tile sizes may vary, but will not exceed 46" x 37" in size. Sections are placed in the box in reverse order so Section 1 will be on the top of the box.

Start the assemble on a flat and level surface. Locate Section 1 and layout your tiles face down in rows from Left to Right.

START HERE

Section 1 will always start in the lower left corner.

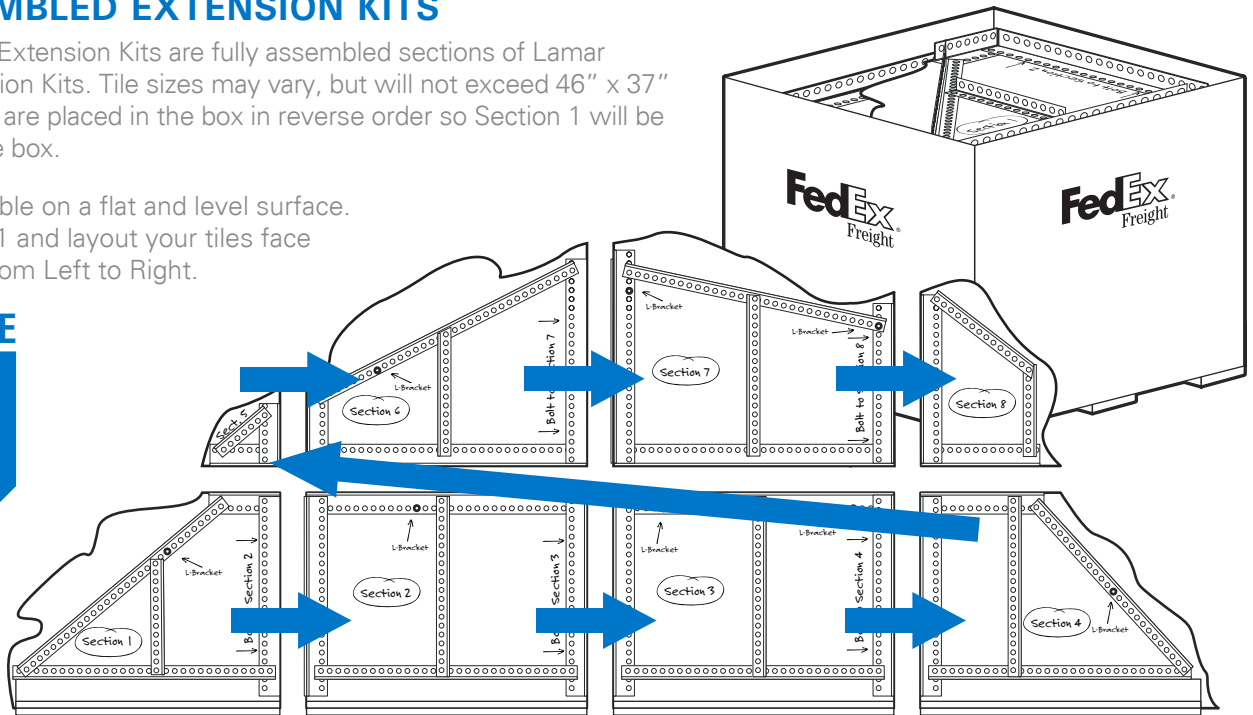


MAST LEG ATTACHMENT POINTS

Lamar recommends the installation of at least one mast leg for every linear section 36 inches of the extension, even if the extension exceeds that limit by only one inch. Mast leg locations will be indicated on each panel where the L-Bracket bolts fall. These locations are noted in pen next to the L-Bracket bolts. Some mast legs on extensions exceeding 36 inches will utilize more than one L-Bracket per mast leg for additional reinforcement.

REQUIRED MAST LEGS

- 0" to 36" = 1 Mast Leg
- 37" to 72" = 2 Mast Legs
- 73" to 108" = 3 Mast Legs
- 109" to 144" = 4 Mast Legs
- 145" to 180" = 5 Mast Legs
- 181" to 216" = 6 Mast Legs
- 217" to 252" = 7 Mast Legs
- 253" to 288" = 8 Mast Legs

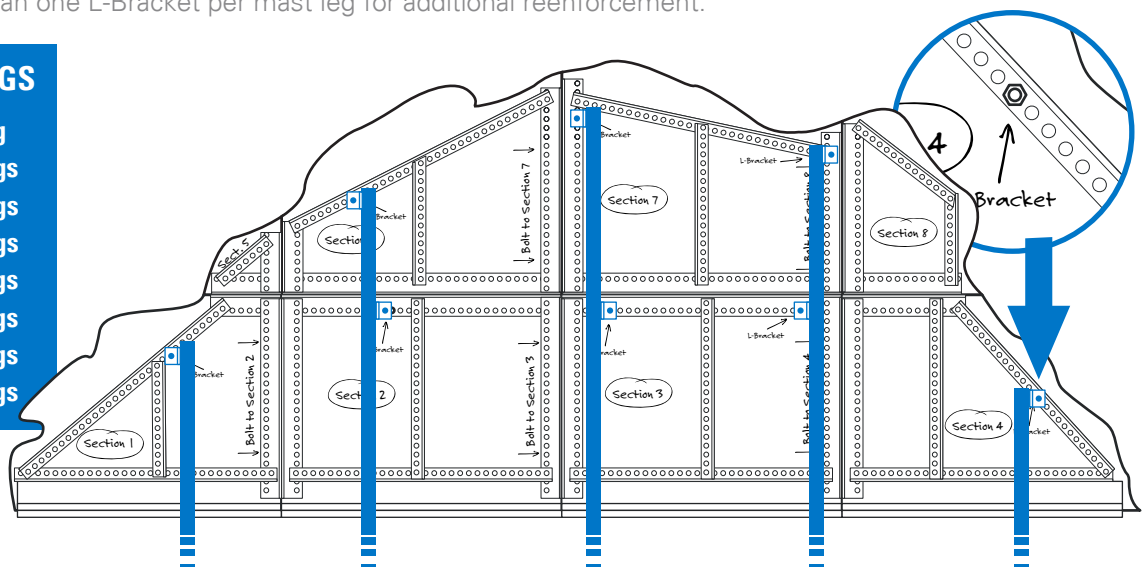

Questions?

Structure types may vary, so modification to these kits may be required. Please contact Charlie Peek (cpeek@lamar.com) or 1.800.952.3113 with questions regarding installation on nonstandard structures.