





Product/Substrate Specifications

PosterFlex™

A reinforcing high density polyethylene scrim coated both sides with a uniquely engineered low density polyethylene blend.

2.9 oz/yd² finished weight
Thickness: 4.0 mils / 0.10mm
*Warranted for 60 days.
Recyclable: Yes

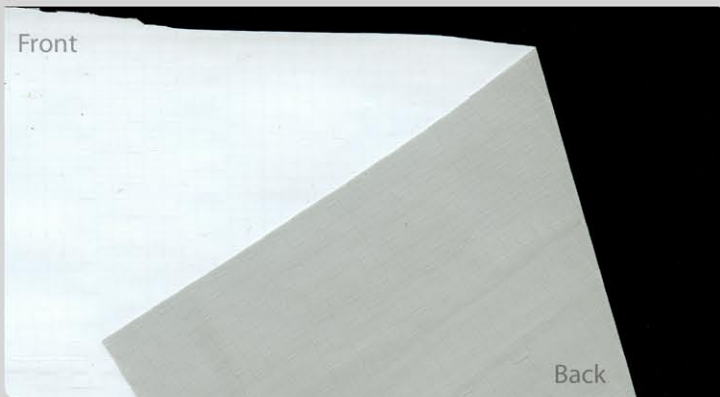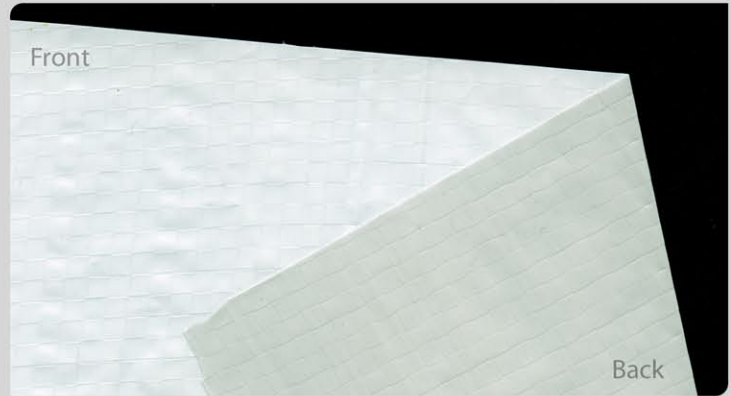

FlexiLite™

Also a reinforcing high density polyethylene scrim coated both sides with a uniquely engineered low density polyethylene blend.

5.0 oz/yd² finished weight
Thickness: 9.0 mils / 0.225mm
*Warranted for 1 year.
Recyclable: Yes

CoolFlex®

CoolFlex® 7oz Frontlit is a PVC-coated fabric for flex sign applications. The material is 7oz extruded PVC membrane reinforced by a polyester fabric.

7.0 oz/yd² finished weight
Thickness: 10 mils / 0.25mm
*Warranted for 1 year.
Recyclable: Yes*

**This product is new to the market. For current recycling information, please contact The Cooley Group directly.*



Product Warranties

All substrates are guaranteed against fading in excess of 15% and material defects or failures for the specified length of time, based on the substrate used. All products should match within 90% of the approved proof upon delivery. This is approximately one color shade on the PMS color chart. One year is defined as 365 days from the print date of the defective board.