

SELF-ADHESIVE TRIVISION SPEC SHEET

DESIGN & FINISHING SPECIFICATIONS

Updated 3/2017

The following specifications can be used when creating a production file for Lamar's Self-adhesive inventory with the exception of Rigiblade TriVisions. If you prefer to download a template in .PDF or .TIFF format, go to: lamargraphics.com/Ign/Prod-Temp.asp.

PRODUCTION RESOLUTION

Lamar TriVisions are set up at 1/2" = 1' scale @ 300ppi document resolution. This equates to about 12.5 pixels per linear inch on the final product.


MECHANICAL SPECIFICATIONS

Hold your design to the dimensions of the structure. The structure size represents the actual image area of the billboard.

Self-adhesive TriVision panels require no bleed. Bulletin templates can be used for this product, the bleed just has to be removed by cropping to the live area.

The individual blades will be cut to the specific panels required width in production.

Use the illustration below as an example:

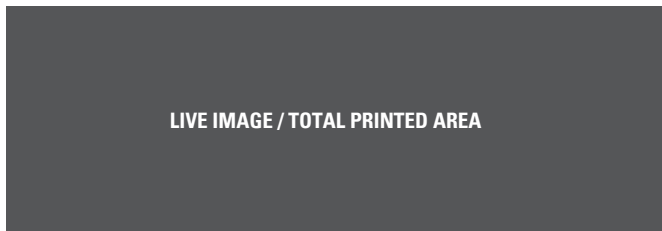

■ LIVE IMAGE / TOTAL PRINTED AREA

THERE IS NO BLEED REQUIRED ON TRIVISIONS.

SELF-ADHESIVE TRIVISIONS ARE CUT TO SPECIFIC LOUVER WIDTHS DURING PRODUCTION.

MATERIAL, SUBSTRATE, INKS & WARRANTIES

Material/Substrate:

Permanent Self-adhesive vinyl

Inks:

Inks must be weatherproof/waterproof with sufficient UV protection and in compliance with product bulletin, bulletin specifications or substrate manufacturer.

Minimum Warranty:

1 year against ink fade, ink peeling, and failure of material.

DESIGN SPECIFICATIONS

Compatible Software:

Adobe Photoshop, Illustrator, or InDesign.*

Acceptable Formats:

Native formats from the software listed above or .PDF, .TIFF, or .EPS.

**Embed fonts when applicable.*

PACKAGING

Louvers should be rolled and boxed so that they can be installed in sequence from left to right. We require that they be shipped in boxes that weigh no more than 100 lbs. Attach a copy of the design to the outside of each box.